


Black-Stone Air Wall-Mount Rack

OWNER'S MANUAL




SCAN ME

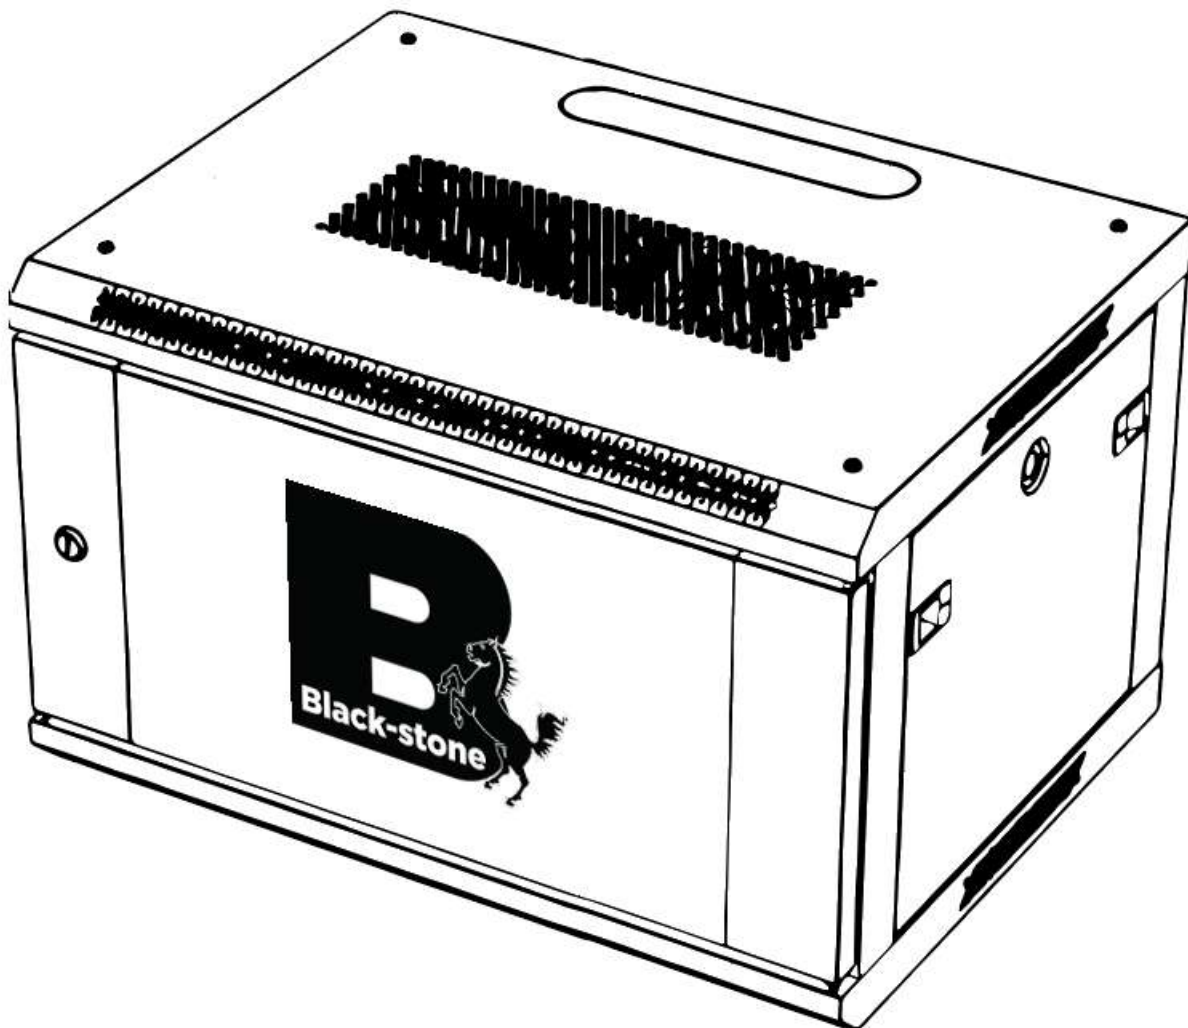

Black-stone

Parts Identificatons

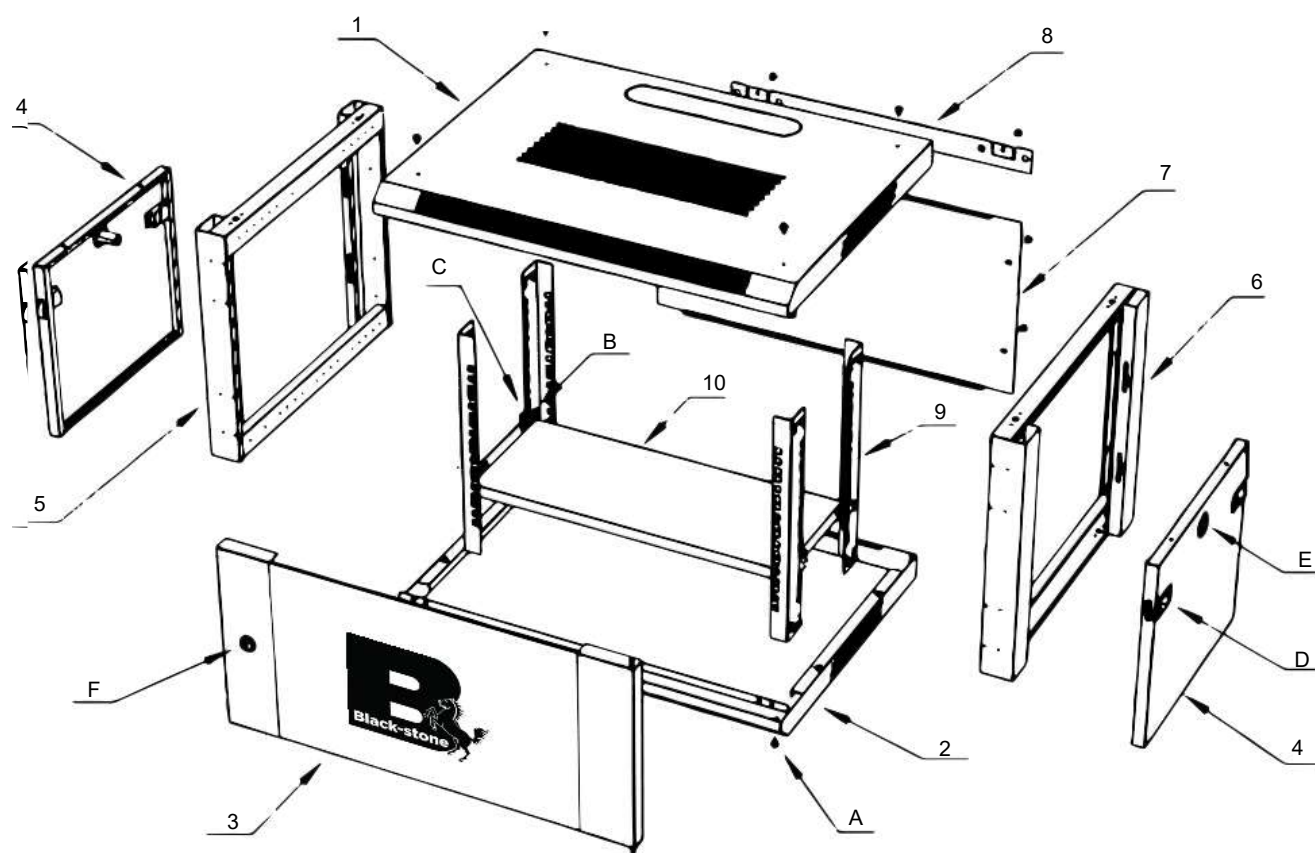


Parts List

1. Top Panel	x1
2. Bottom Panel	x1
3. Front Door	x1
4. Side Panels	x2
5. Left Frame	x1
6. Right Frame	x1
7. Rear panel	x1
8. Rear suspension	x1
9. Vertical Mounting Rails	
10. Pallet	x4 x1

A: M5 Screws	x40
B: M6 Hex Head Screws	x15
C: M6 Cage Nuts	x15
D: Side Panel Latches	x4
E: Side Panel Lock Kit	x2
F: Front Door Lock Kit	x1
G: M10 Expansion screws	x4
H: Hex brass nut for screw bolt	x1
I: Expansion bolts	x4

Black-stone

Assembly Instructions

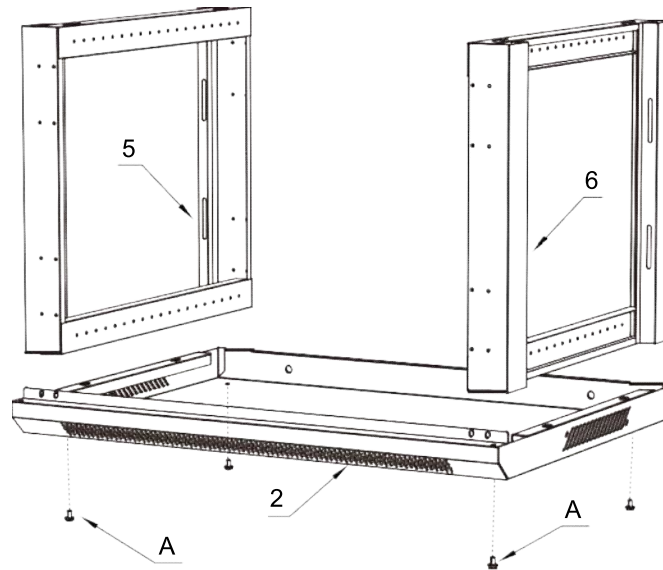


1. Frame Installation

Insert the Left Frame (#5) and Right Frame (#6) into the Bottom Panel (#2). Secure with M5 Screws (A).


2. Top Panel Attachment

Place the Top Panel (#1) onto the Front Frame (#5) and Back Frame (#6). Secure using M5 Screws (A).

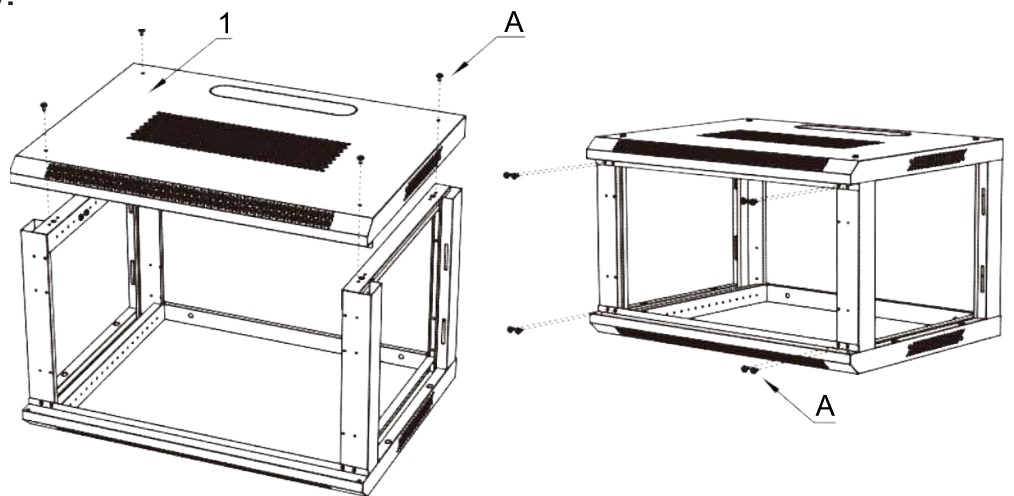


3. Vertical Mounting Rails Installation

Position the 4 Vertical Mounting Rails (#9) at your desired depth, securing each rail with M5 Screws (A).

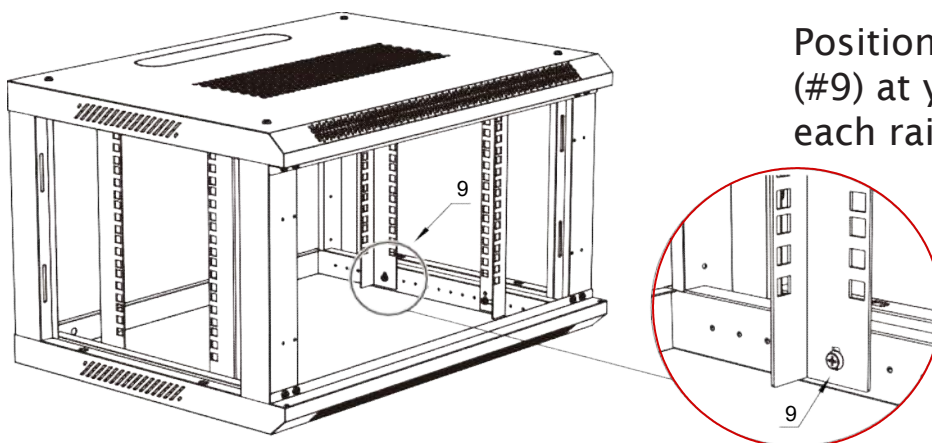**Black-stone**

4. Pallet Installation

Position the Pallet (#10) at your preferred height, securing it with M6 Hex Head Screws (B) and M6 Cage Nuts (C).

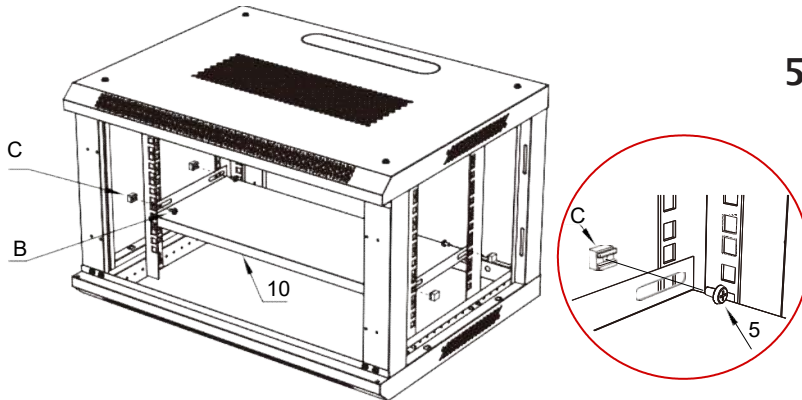


5. Side Panel Latches and Locks

Attach the Side Panel Latches (D) and Side Panel Locks (E) to each Side Panel (#4).

Note: Choose an appropriate depth for the rails based on the equipment you plan to install. Ensure that the rail depth on both sides of the cabinet is even.

6. Side Panels Installation

Insert the two Side Panels (#4) using the Side Panel Latches. Once secured, ensure each Side Panel Lock engages properly.

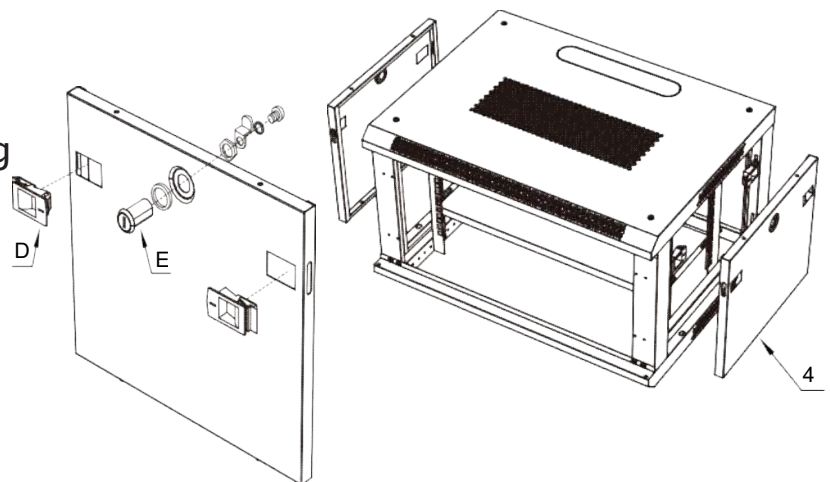


7. Front Door Lock Installation

Attach the Front Door Lock (F) to the Front Door (#3).

8. Front Door Positioning


Align the top and bottom pins of the Front Door (#3) with the hinge holes on the enclosure. Insert the bottom

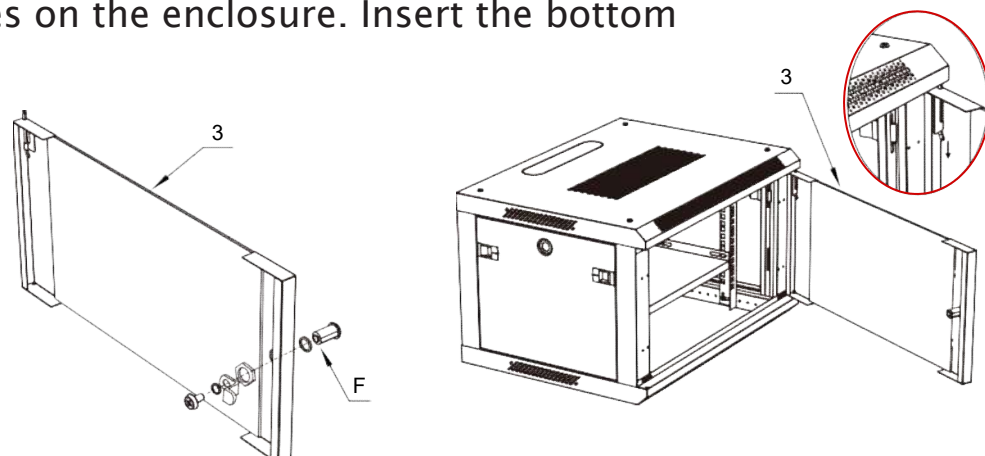

Black-stone

9. Rear Panel and Suspension Installation


Position the Rear Panel (#7) and Rear Suspension (#8) in place. Secure with M5 Screws (A).

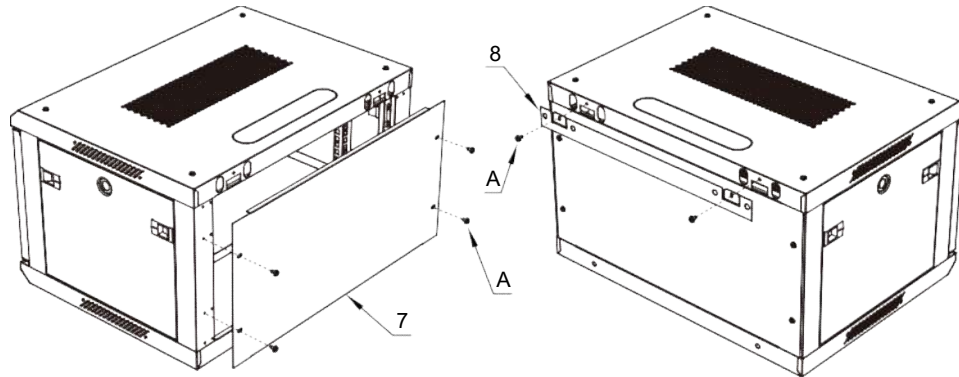

Wall Mounting Instructions

Rack Attachment

Secure the rack to a wall or suitable mounting surface using M10 Expansion Screws (G). Refer to the diagram for correct mounting hole spacing, designed to match standard stud placements.

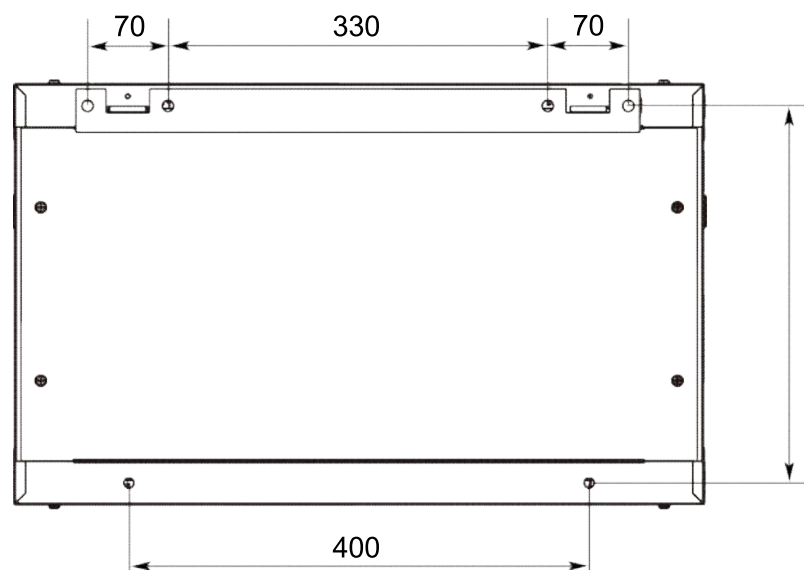

Warning: Do not mount the rack to the wall if it already contains equipment. The enclosure supports a maximum load of 100 pounds. Ensure that both the wall structure and mounting hardware can adequately support the combined weight of the enclosure and any installed equipment.

Black-stone

PRODUCT PARAMETER

Name	Wall Mount Server Enclosure					
Height	6U	9U	12U	15U	18U	22U
Product size (mm)	350*600*450	500*600*450	640*600*450	800*600*450	1000*600*450	1200*600*450
Package size (mm)	230*670*530	230*670*530	230*670*680	230*670*890	230*670*1090	230*670*1290
Weight (kg)	14.5	17.4	20.9	24.5	28.6	32.5
Product size (mm)	350*600*600	500*600*600	640*600*600	800*600*600	1000*600*600	1200*600*600
Package size (mm)	230*670*710	230*670*710	230*670*710	230*670*890	230*670*1090	230*670*1290
Weight (kg)	17.3	20.6	24.5	27.9	33.3	38
Door	Tempered glass door or mesh iron door					
Installation width standard	19"					
Ground-mounted load-bearing	100kg					
Wall-mounted load-bearing	80kg					

Includes

Discription	Includes
19' Wall mount cabinet 600x450x6U/9U/12U - 600x600x9U/12U/15U	1- front type C glass door (grey glass) with small lock, 2- two fan holes with one fan (cable ; 3G0.75mm²x1.2M) plug: Based on Country 3- two side removable panels with plastic locks 4- The rail with U mark Printed white in color 5、 with one PDU (19" 1U aluminum 6way with switch, cable: 3G1.5mm²x1.8M) plug: Based on Country